

attwood® Three-Position Pull Switch 7594

Installation Instructions

Attwood marine hardware, navigational lighting, bilge pumps, and other marine accessories are specified more than any other brand by America's best-known boat manufacturers as original equipment. Look to Attwood for quality replacement parts and marine accessories.

SAVE THESE INSTRUCTIONS

Form Number 69408 Rev. A

03-01

REQUIRED FOR INSTALLATION

- Drill with $\frac{3}{8}$ " (10mm) dia. bit
- Slotted or phillips screwdriver
- Pliers / or adjustable end wrench
- Requires minimum 2" (50mm) clearance behind mounting panel after installation.


APPLICATION

- Install switch in dashboards or panels up to 1" (25mm) thick.
- Rated load is 20 amps.

MOUNTING INSTRUCTIONS

1. Bring power source wire and switched wires to panel. Attach wires to terminal screws. Figure 1
2. Remove chrome handle and chrome nut from shaft.
3. In desired location, drill $\frac{3}{8}$ " (10mm) dia. hole through panel. From inside panel, insert shaft through hole.
4. Tighten chrome nut and handle onto end of shaft. From inside, tighten brass nut and washer against panel.

Figure 1

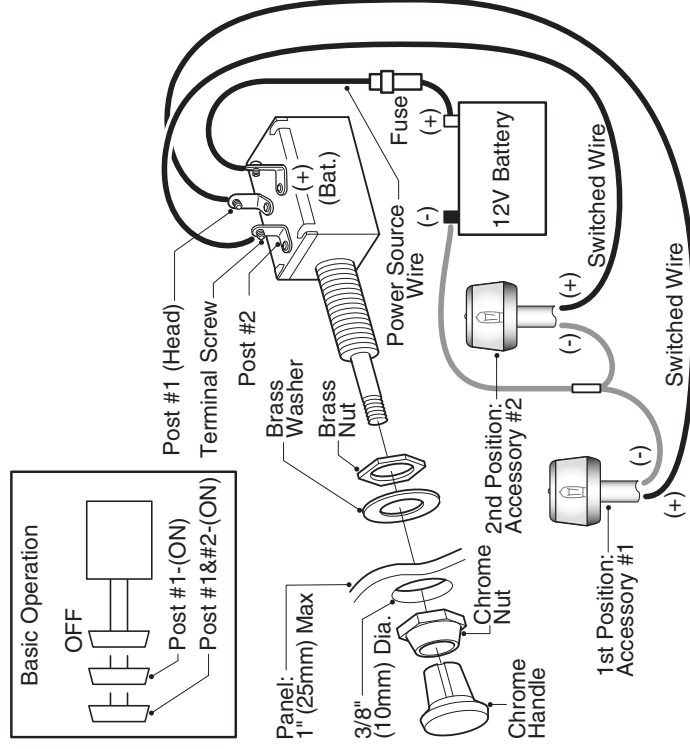

© 2003 Attwood Corporation
1016 N. Monroe Street, Lowell, MI 49331-0260 www.attwoodmarine.com